DID YOU KNOW?

about our...





Serrated Flanged Hex Bolt

SERRATED FLANGED HEX BOLT ZINC PLATED (ROHS COMPLIANT) / HEC 1665 / CLASS 4.6 UTS


Part	Size	Length	Pack Qty
		(mm)	
BF46ZCM200060	M20	60	25

INSTALLATION

Used for connecting temporary props to pre-cast concrete panels. Bolts are screwed into ferrules castin to the concrete and remain in place until the panel is permanently secured. The Bolts are then removed and the holes are patched.



Used for fastening temporary props for concrete tilt panels

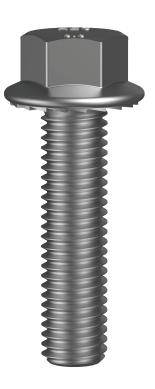



FEATURES

Flange for a quicker and easier install compared to using a flat or square washer.

Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.

