

DID YOU KNOW?

about our...





**NEW
PRODUCT**


Lifting Bow Shackle Safety Pin

LIFTING BOW SHACKLE SAFETY PIN GRADE S / HOT DIP GALVANISED / AS2741

Part	QFind	WLL (Tonne)	Dimensions						Pack Qty
			D (mm)	W (mm)	L (mm)	E (mm)	B (mm)	d (mm)	
ULSHGSGBS-13	BSS13	2.00	16	21	48	33	33	13	20
ULSHGSGBS-16	BSS16	3.20	19	27	61	40	43	16	5
ULSHGSGBS-19	BSS19	4.70	22	32	72	48	51	19	5
ULSHGSGBS-22	BSS22	6.50	25	37	84	54	58	22	5
ULSHGSGBS-25	BSS25	8.50	29	43	95	60	68	25	4
ULSHGSGBS-29	BSS29	9.50	32	46	108	67	74	29	4
ULSHGSGBS-32	BSS32	12.00	35	52	119	76	83	32	3
ULSHGSGBS-35	BSS35	13.50	38	57	133	84	92	35	2
ULSHGSGBS-38	BSS38	17.00	41	60	146	92	98	38	1
ULSHGSGBS-44	BSS44	25.00	51	73	178	110	127	44	1
ULSHGSGBS-51	BSS51	35.00	57	83	197	127	146	51	1
ULSHGSGBS-63	BSS63	55.00	70	105	267	152	184	63	1

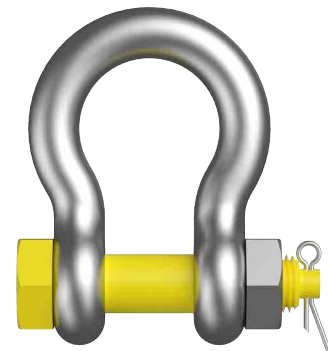

MARKINGS:

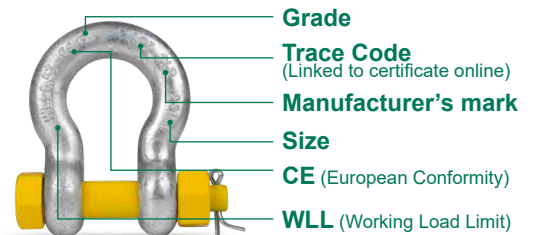

FEATURES

- Approved for lifting
- Safety pin for long-term applications

APPLICATIONS

- Links in lifting systems
- Multi sling connections
- Rigging connections
- Vehicle recovery and towing
- Tension structures



You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au **QUALITY FASTENERS SINCE 1935**

