



DID YOU KNOW?

about our...



**NEW
PRODUCT**

Lifting Swivel Eye Bolt Ring

Approved and certified for lifting.
Can be used in axial  or angular  loading.

LIFTING SWIVEL EYE BOLT RING GRADE 80 / POWDER COATED / HEC



Part	Qfind	Size	WLL (Tonne)		Dimensions (mm)						Pack Qty
			M	0°	90°	A	B	ØW	ØD	H	
ULES08PBRM08	ES08BRM8	M8	0.60	0.30	55	30	36	14	51	13	10
ULES08PBRM10	ES08BRM10	M10	1.00	0.50	55	30	36	14	51	18	10
ULES08PBRM12	ES08BRM12	M12	1.00	0.50	55	30	36	14	51	18	10
ULES08PBRM16	ES08BRM16	M16	2.20	1.12	55	30	36	14	52	35	10
ULES08PBRM20	ES08BRM20	M20	4.00	2.00	70	35	50	16	68	30	5
ULES08PBRM24	ES08BRM24	M24	6.30	3.15	85	40	57	18	78	30	2
ULES08PBRM30	ES08BRM30	M30	10.60	5.30	85	40	66	20	97	35	2
ULES08PBRM36	ES08BRM36	M36	12.80	8.00	115	50	80	22	109	50	2



**180° lateral
ring rotation**

MARKINGS:

- **CE**
(European Conformity)
- **WLL**
(Working Load Limit)
- **Trace Code**
(Linked to certificate online)
- **Size**
- **Manufacturer's mark**

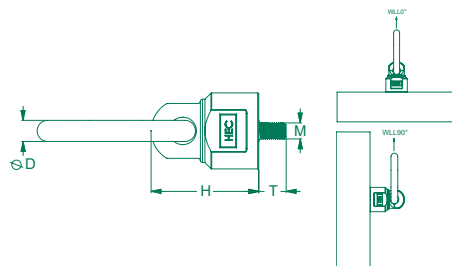

FEATURES

- Swivel load ring for rotation under load
- Suitable for dynamic lifting
- 360° Swivel and 180° Pivot motions
- Use with Grade 80 lifting components



You can download this
Test Certificate and/or
Report from our website:

hobson.com.au

Disclaimer: While every reasonable effort has been made to ensure that this document is correct at the time of printing, Hobson Engineering®, its agencies and employees, disclaim any and all liability to any person in respect of anything or the consequences of anything done or omitted to be done in reliance upon the whole or any part of this document.

Bolt Tension | Anti-Vibration | Product Reliability | Traceability

hobson.com.au QUALITY FASTENERS SINCE 1935

